

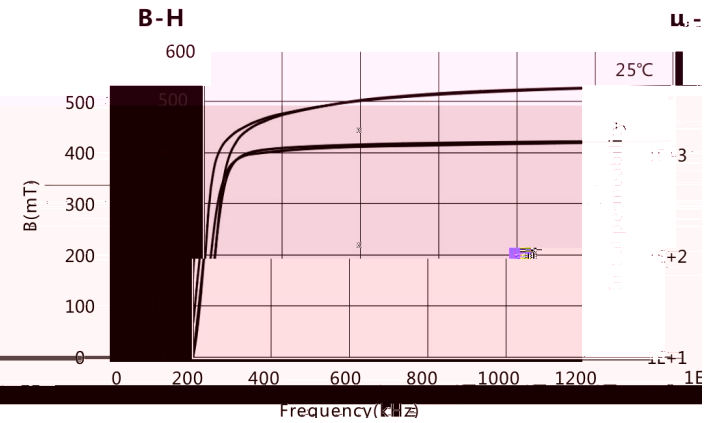
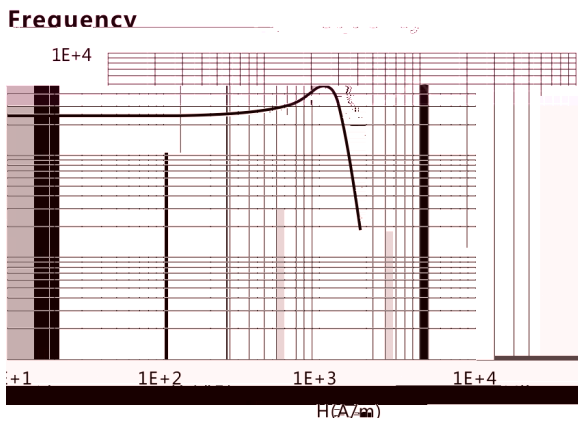


		Temperature		H=1194A/m
Initial permeability	μ_i	25°C	2400±25%	600
Saturation magnetic	B_s (mT)	25°C	510	500
Flux density		100°C	390	
Remanence	B_r (mT)	25°C	110	
		100°C	60	
Coercivity	H_c (A/m)	25°C	13	
		100°C	6.5	
Core loss	P_{cv} (kW/m ³)	25°C	600	
		100°C	300	
		100kHz 200mT	120°C	400
Curie temperature	T_c (°C)	>215		
Electrical resistivity	ρ (Ω ·m)	6.5		

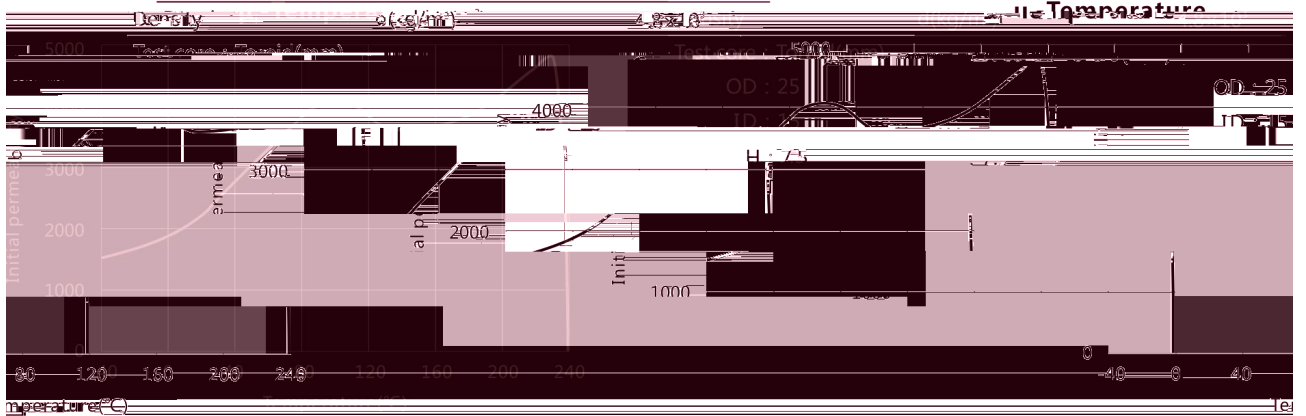

Pcv-Temperature

μ_a -Bm

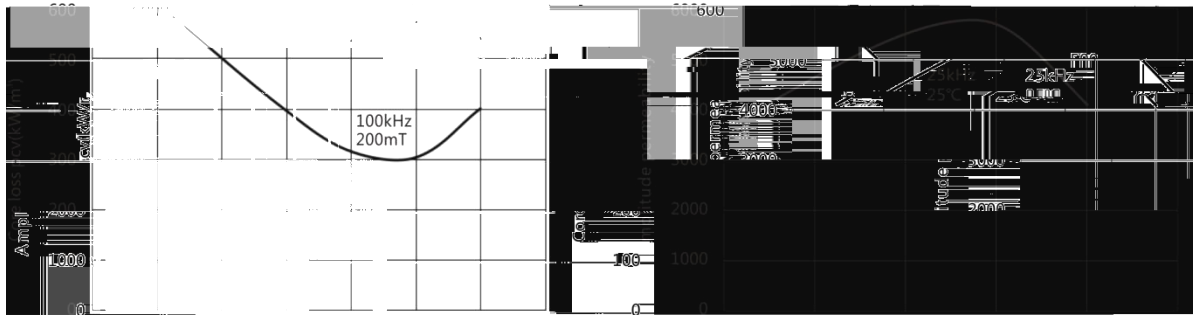


Temperature(°C)

Flux Density(mT)

Pcv-Bm

Pcv-Bm

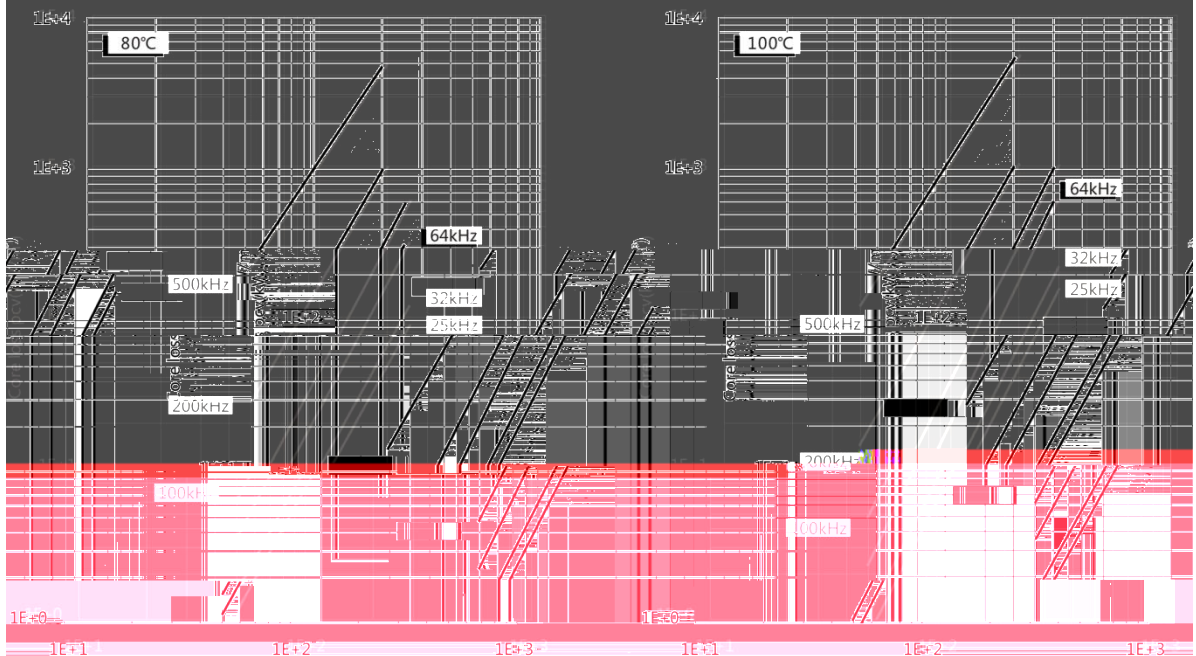

Flux Density(mT)

Flux Density(mT)