



**Bs-Temperature**

H=1194A/m


Flux density	1194A/m	100°C	450
Permeance	Br(mT)	25°C	180
		100°C	70
Coercivity	Hc(A/m)	25°C	4
		100°C	7
Core loss	Pcv(kW/m³)	25°C	700
		100°C	320
	Electrical resistivity	$\rho(\Omega\cdot m)$	4
	Density	d(kg/m³)	$4.8 \times 10^3$

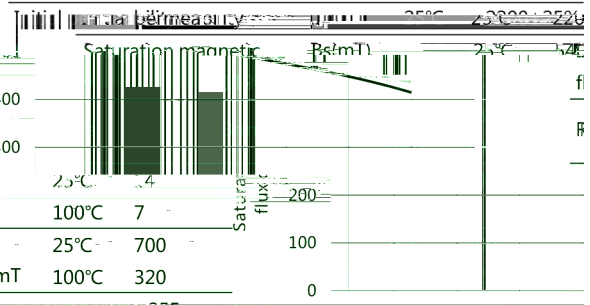


**$\mu_i$ -Temperature**

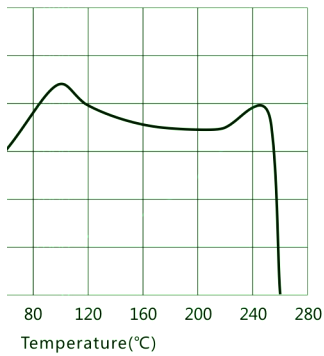



OD : 25  
ID : 15  
H : 7.5




**$\mu_i$ -Frequency**

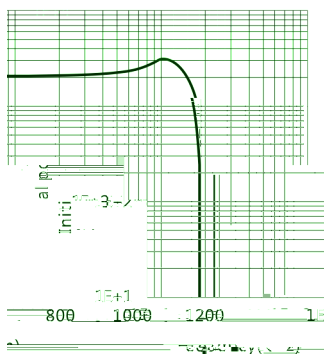


**B-H**

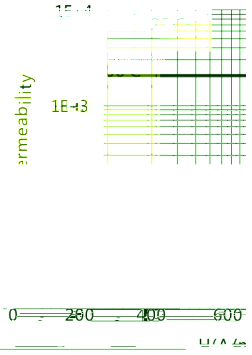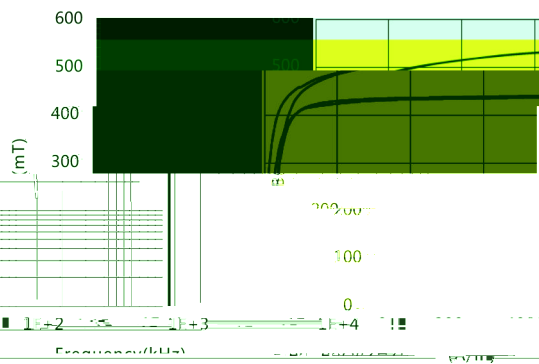


**Pcv-Temperature**

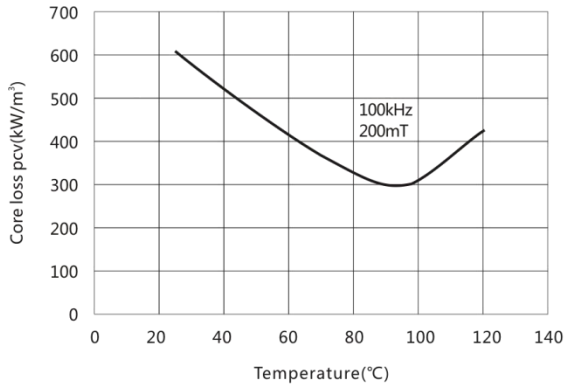

**$\mu_a$  - Bm**

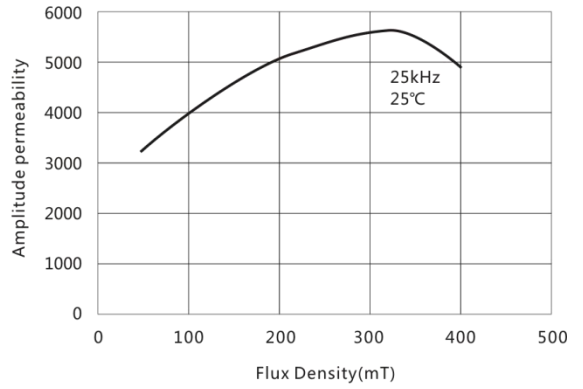

**Pcv-Bm**

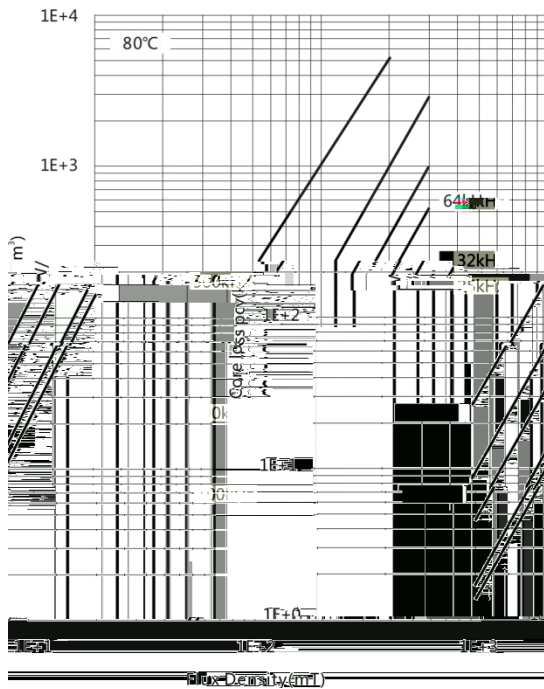

**Pcv-Bm**

